


Notes for Sleeper Subfloor:

1. Racquetball floor system with  $\frac{25}{32}$ " x  $2\frac{1}{4}$ " first grade maple. Includes 6 mil poly, sleepers with  $\frac{3}{8}$ " rubber pads spaced 9" o.c., 2 finish coats, and painted game lines. A  $\frac{1}{2}$ " gap is left between the side walls and floor for air movement and expansion. Floor installed according to industry standards.
2. Standard court floor is  $2\frac{5}{8}$ " thick.
3. Concrete slab tolerance is  $\pm \frac{1}{8}$ " over 10'0" radius.



SLEEPER SUBFLOOR SYSTEM.

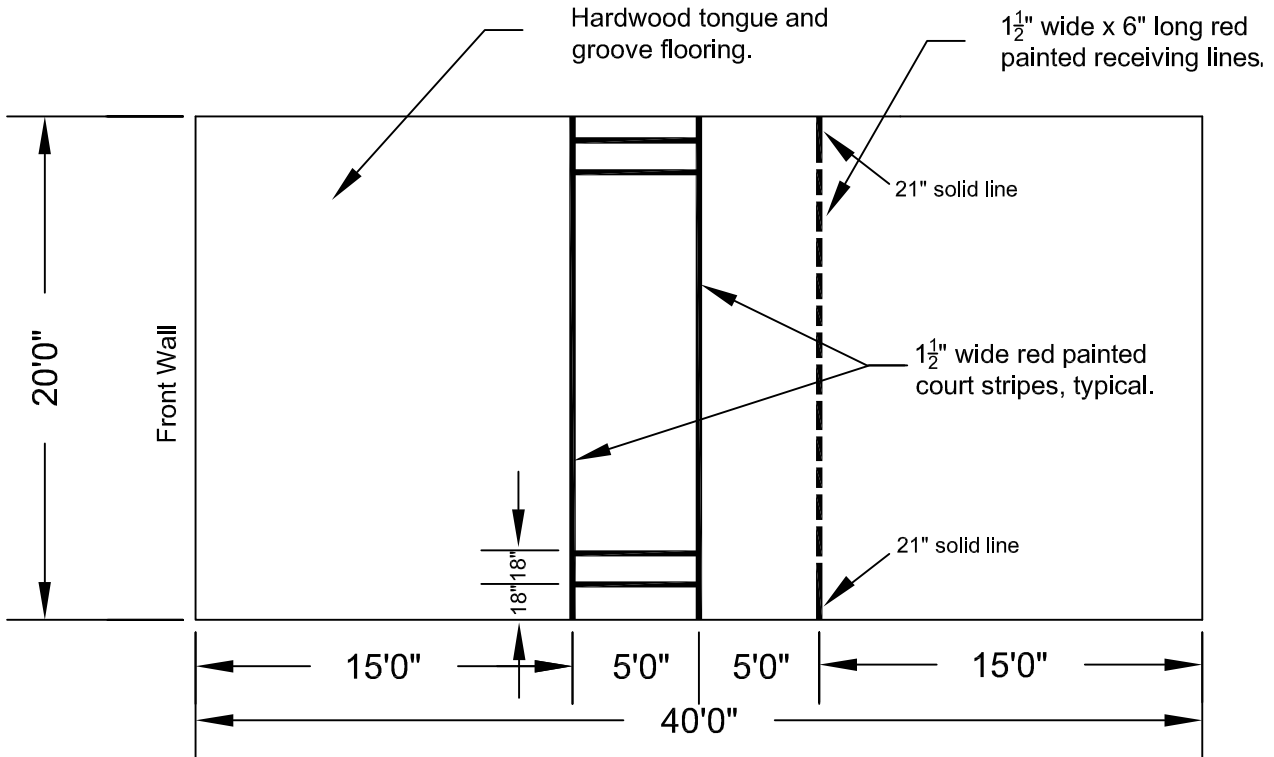

The Court Company  
 3059 Forest Hill-Irene Road  
 Germantown, TN 38138 USA

Drawings are submitted for review for contracted project and are to be used accordingly.  
 Drawings are not to scale.

Racquetball Court  
 Floor Striping

Page