


Notes for Sleeper Subfloor:

1. WSF certified squash floor system with $\frac{25}{32}$ " x $2\frac{1}{4}$ " first grade maple. System includes 6 mil poly, sleepers with $\frac{3}{4}$ " rubber pads spaced 9" o.c., and painted game lines. A $\frac{1}{4}$ " gap is left between the side walls and floor for air movement and expansion. Floor installed according to industry standards.
2. Squash floor will not be sealed nor finished per squash industry standards.
3. Standard certified court floor is approximately 3" thick.
4. Concrete slab tolerance is $\pm \frac{1}{8}$ " over 10'0" radius.



SLEEPER SUBFLOOR SYSTEM

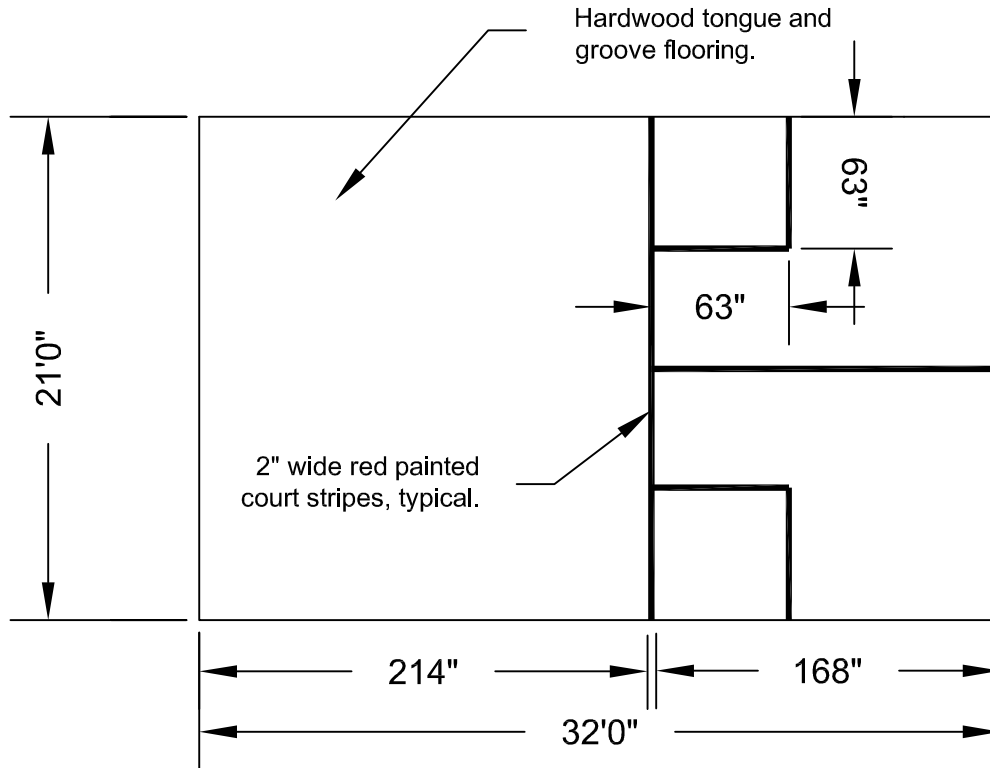

The Court Company
3059 Forest Hill-Irene Road
Germantown, TN 38138 USA

Drawings are submitted for review for contracted project and are to be used accordingly.
Drawings are not to scale.

Squash Court Floor
Striping (WSF)

Page